

Controls



Remote control

Dual top mount remote control R/H

06240-ZW5-U60

- Dual engines, forward/reverse levers, throttles, fast idle, trim/tilt switches, drilling dimension 140x110 mm, right hand trim operation

Application as from BF40 up to BF225



Dual top mount remote control L/H

06240-ZW5-U70

- Dual engines, forward/reverse levers, throttles, fast idle, trim/tilt switches, drilling dimension 140x110 mm, left hand trim operation

Application as from BF40 up to BF225



Single top mount remote control R/H

06240-ZW5-U40

- Single engine, forward/reverse lever, throttle, fast idle, trim/tilt switch, drilling dimension 140x65 mm, right hand trim operation

Application as from BF40 up to BF225



Single top mount remote control L/H

06240-ZW5-U50

- Single engine, forward/reverse lever, throttle, fast idle, trim/tilt switch, drilling dimension 140x65 mm, left hand trim operation

Application as from BF40 up to BF225



Controls



Remote control

Panel/flush mount remote control R/H

06240-ZW7-U00

- Single engine, forward/reverse lever, throttle, fast idle, neutral lock, trim/tilt switch, drilling dimension 140x88 mm, right hand trim operation

Application as from BF40 up to BF225



Panel/flush mount remote control L/H

06240-ZW7-U10

- Single engine, forward/reverse lever, throttle, fast idle, neutral lock, trim/tilt switch, drilling dimension 140x88 mm, left hand trim operation

Application as from BF40 up to BF225



Side mount remote control box

06240-ZV4-010

- For manual start/choke models, forward/reverse lever, throttle, fast idle, emergency stop switch, starboard installation only

Application as from BF4.5 up to BF15



Side mount remote control box

24800-ZW9-830

- Key switch, oil pressure/engine temp warning light, emergency stop switch, fast idle lever, neutral lock and detachable 16' main harness, port or starboard mounting, can be mounted in pairs

Application BF8, BF10



Controls



Remote control

Side mount remote control (without power tilt switch)

24800-ZY1-810

- Key switch, oil pressure/engine temp warning light, emergency stop switch, fast idle lever, neutral lock and detachable 16' main harness, intended for none power tilt, models port or starboard mounting, can be mounted in pairs

Application new BF15, BF20



Side mount remote control (with power tilt switch)

24800-ZY1-870

- Key switch, tilt switch, oil pressure/engine temp warning light, emergency stop switch, fast idle lever neutral lock and detachable 16' main harness, port or starboard mounting, can be mounted in pairs

Application new BF15, BF20



Side mount remote control (without power tilt switch)

24800-ZW4-H00

- Gas assist tilt type without Power trim tilt switch on the control lever (without choke function in the lever)

Application BF25D4 until BF50A4



Side mount remote control

24800-ZW4-H11

- Power trim tilt type with Power trim tilt switch on the control lever (without choke function on the lever)

Application BF25D4 until BF50A4



Controls



Remote control

Side mount remote control box

24800-ZV5-020

- Key switch, oil pressure/engine temp warning light, emergency stop switch, choke/fast idle lever, neutral lock and detachable 16' main harness, intended for non power trim/tilt, models port or starboard mounting, can be mounted in pairs

Application as from BF25 up to BF50



Side mount remote control box

24800-ZW1-010

- Key switch, trim/tilt switch, oil pressure/engine temp warning light, emergency stop switch, choke/fast idle lever, neutral lock and detachable 16' main harness, intended for power trim/tilt, models port or starboard mounting, can be mounted in pairs

Application as from BF40 up to BF50A4 and BF75A1 up to BF90A1



Side mount remote control box

24800-ZW1-030

- Key switch, trim/tilt switch, oil pressure/engine temp warning light, emergency stop switch, choke/fast idle lever, neutral lock and detachable 16' main harness, intended for power trim/tilt, models port or starboard mounting, can be mounted in pairs

Application as from BF75A2 until BF90A2



Side mount remote control box

24800-ZW5-621

- Key switch, trim/tilt switch, oil pressure/engine temp warning light, emergency stop switch, fast idle lever, neutral lock and detachable 16' main harness, port or starboard mounting, can be mounted in pairs

Application BF115, BF130



Controls



Remote control

Side mount remote control box

24800-ZY3-010

- Key switch, trim/tilt switch, oil pressure/engine temp warning light, emergency stop switch, choke/fast idle lever, neutral lock and detachable 16' main harness, intended for power trim/tilt, models port or starboard mounting, can be mounted in pairs

*Application BF115A4 until BF150A4
and BF175 until BF225*



Controls



Conversion kit

Emergency engine stop switch

36182-ZV4-650

- Plastic lanyard, attaches engine stop switch to operator, fits all AM and subsequent models (after 1990)

Application as from BF2 up to BF225



Engine bracket kit

06170-ZV1-811

- Connects steering link arm and shift/throttle cables

Application BF4.5, BF5



Engine bracket kit

06170-881-812

- Connects steering link arm and shift/throttle cables

Application BF6



Tiller handle kit

06533-ZW2-F50ZA

- Tiller handle kit

Application BF25D4, BF30D4



Controls




Conversion kit

Tiller handle kit

06531-ZV3-U00ZA

- Tiller handle and mount, start switch, gearshift, oil pressure/engine temp alert lamps, intended to convert a remote model to a tiller handle model

Application BF40, BF50

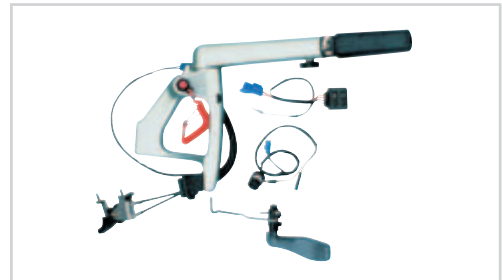

Tiller handle kit

06533-ZW4-H00ZA

- Tiller handle kit AT (Gas assist tilt)

Application BF40A4, BF50A4



Tiller handle kit

06533-ZW4-H40ZA

- Tiller handle kit PTT (Power trim tilt)

Application BF40A4, BF50A4



Conversion kit handle to remote control

06532-ZW9-000HE

- Kit to convert a handle outboard type to a remote control type
- This kit doesn't include the side mount remote control and cables and doesn't allow the user to steer the boat
- No steering tube to fix the steering cable
- Part: 24221-ZW9-000 (1 piece) has to be removed from the engine to facilitate the shifting

Application BF8, BF10



Controls



Conversion kit

■ Conversion kit handle to remote control

06532-ZY0-000HE

- Kit to convert a handle outboard type to a remote control type
- This kit doesn't include the side mount remote control and cables and doesn't allow the user to steer the boat
- No steering tube to fix the steering cable
- Part: 24221-ZW9-000 (1 piece) has to be removed from the engine to facilitate the shifting



Application BF15, BF20

Controls



Steering



Steering plate

53234-ZW9-830

- Intended for twin rigging or hydraulic steering fitting, additional mounting hardware required

Application BF8 up to BF20

Steering plate

53234-ZV7-781

- Intended for twin rigging or hydraulic steering fitting, additional mounting hardware required,

Application BF25, BF30

Steering plate

53234-ZW1-010

- Intended for twin rigging or hydraulic steering fitting, additional mounting hardware required,
2 plates required for twin engine installation

Application BF75, BF90

Steering plate

53234-ZW5-010

- Intended for twin rigging or hydraulic steering fitting, additional mounting hardware required,
2 plates required for twin engine installation

Application BF115, BF130



Steering

Steering tube seals (anodised aluminium)

50899-ZV5-000AH

- With O-ring seal keeping dirt out and grease in
- Includes grease fitting

Application as from BF10 up to BF50



Steering tube seals (stainless steel)

50899-ZV5-020AH

- With O-ring seal keeping dirt out and grease in
- Includes grease fitting

Application as from BF10 up to BF50



Dual engine tie bar

53520-ZV7-U00

- Right/left threaded ends enabling easy adjustment without disconnecting
- Stainless steel construction
- Minimum length 45 cm/maximum length 60 cm

Application as from BF20 up to BF90



Dual engine tie bar

53520-ZV7-U10

- Right/left threaded ends enabling easy adjustment without disconnecting
- Stainless steel construction
- Minimum length 57 cm/maximum length 72 cm

Application as from BF20 up to BF90



Controls



Steering

Dual engine tie bar

53520-ZY3-U00HE

- Right/left threaded ends enabling easy adjustment without disconnecting
- Stainless steel construction
- Minimum length 30 cm/maximum length 96 cm

Application as from BF115 up to BF225



SST Hydrofoil (Super Sonic Transport)

06998-ZW7-A00AH

- Two pieces colour match hydrofoil provides additional stern lift

Application as from BF25 and up



Controls



Notes

A series of horizontal dotted lines for taking notes, spanning the width of the page below the 'Notes' header.

